


PROJECT:	TYPE:	CAT. #: D2 - - - - -
----------	-------	----------------------

## PROFILE

LIGHT SOURCE	200W, 300W, 380W
OPTICS	ASYMMETRIC INDIRECT LIGHTING
CCT	2700K, 3000K, 3500K, 4000K
CRI	80 CRI
VOLTAGE	UNIVERSAL 120-277 V (OPTIONAL 347V)
POWER	INTEGRATED POWER SUPPLY
DIMMING	0-10V (DIMS DOWN TO 10%)
WEIGHT	40 LBS (18.1 KG)
HOUSING	EXTRUDED ALUMINUM HOUSING
LENS	TEMPERED GLASS
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-40° C TO 50° C (380W -40° TO 40°C)
LUMEN MAINTENANCE	84,000 HOURS
CERTIFICATION	ETL AND cETL FOR DRY LOCATION IP66 OPTION




## STANDARD FINISHES

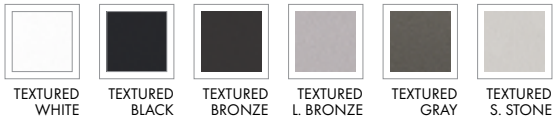

## DIMENSIONS



## OPTICS



## PERFORMANCE SUMMARY

LARGE		
4000K	LUMENS	EFFICACY
200W	20145	103 lm/W
300W	34084	110 lm/W
380W	38174	100 lm/W

PROJECT:	TYPE:	CAT. #:	D2 -	-	-	-	-	-	-
----------	-------	---------	------	---	---	---	---	---	---

## ORDERING INFORMATION

D2								
1	2	3	4	5	6	7	8	

### 1 FIXTURE

D2 INTERIOR D2  
for exterior use, see IP66 option  
For use in natatorium applications, use CRF and IP66 options

### 2 WATTAGE

200 WATTS 200  
300 WATTS 300  
380 WATTS 380  
380W maximum 40°C ambient temperature  
see D1 for lower wattages

### 3 CCT

2700K 27K  
3000K 30K  
3500K 35K  
4000K 40K

### 4 MOUNTING

SURFACE/WALL SM  
PENDANT SINGLE FIXTURE PN-X  
PENDANT TWIN FIXTURE T22-X  
X = specify pendant length (24" min, 96" max)  
See options for Swivel Canopy.  
Ceiling canopies are painted semi-gloss white.

### 5 VOLTAGE

UNIVERSAL UNV  
120V - 277V  
347V 347  
Contact factory for 347V

### 6 CONTROLS

NON-DIMMING NO  
0-10V DIMMING DIM  
Dims to 10%. Contact factory for 1% dimming.  
Dimming controls to be supplied by others.  
Dimming controls to be supplied by others.

### 7 FINISH

TEXTURED WHITE TW  
TEXTURED BLACK TB  
TEXTURED BRONZE TBR  
TEXTURED LIGHT BRONZE TLB  
TEXTURED GRAY TG  
TEXTURED SANDSTONE TS  
CUSTOM COLOR CC  
contact factory for custom color

### 8 OPTIONS

SWIVEL CANOPY SC  
for use with PN and T22 mounting options  
COLUMN MOUNT CM-X  
contact factory for column mount  
IP66 RATING IP66  
for exterior use  
CORROSION RESISTANT FINISH CRF  
CRF is recommended for natatorium applications,  
coastal and extreme exterior environments

## PERFORMANCE

WATTAGE (4000K)	DELIVERED LUMENS	LUMINARE EFFICACY
200 W	20145 lm	103 lm/W
300 W	34084 lm	110 lm/W
380 W	38174 lm	100 lm/W


## FIXTURES PER CIRCUIT - BASED ON 13AMP CIRCUIT

WATTAGE	120V	277V
200 W	8	18
300 W	5	12
380 W	3	9


PROJECT:	TYPE:	CAT. #: D2 - - - - -
----------	-------	----------------------

## DIMENSIONS

### D2 - SURFACE/WALL (SM)

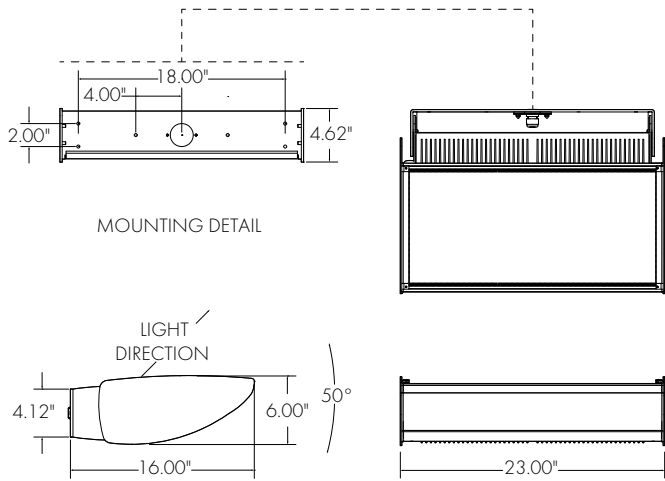

### D2 - PENDANT SINGLE FIXTURE (PN)

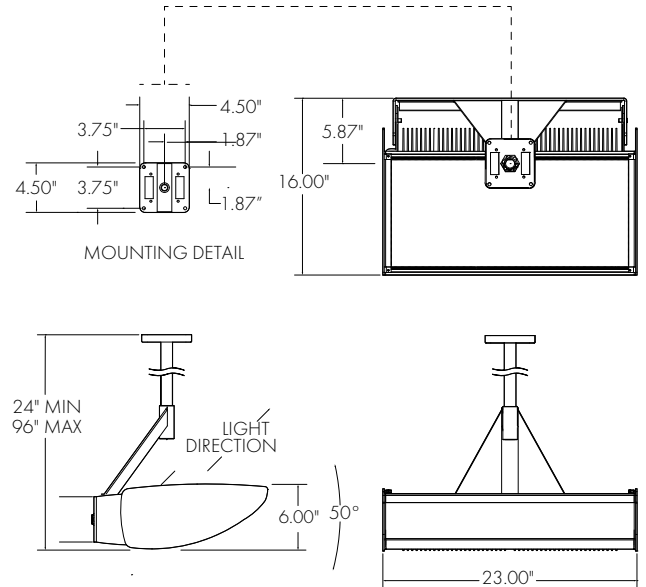

### D2 - PENDANT TWIN FIXTURE (T22)

