

PROJECT:	TYPE:	CATALOG #:	PRS - 11 - 50K -	-	-	-	-	-	-
----------	-------	------------	------------------	---	---	---	---	---	---

## SPECIFICATION

LIGHT SOURCE	11 W/FT
CCT	5000K
CRI	80 (± 200)
VOLTAGE	UNIVERSAL 120-277 V
POWER	INTEGRATED POWER SUPPLY
CONTROL	DIMMING
DIMENSIONS	6" - 24" HEIGHT X 12" - 96" LENGTH
WEIGHT	4.375 LBS/FT <sup>2</sup>
HOUSING	UPPER ALUMINUM EXTRUSION
OPTICAL SYSTEMS	TRANSPARENT CAST ACRYLIC, 8MM THICKNESS, LASER ETCHED
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-25° C TO 40° C
LUMEN MAINTENANCE	75,000 HOURS L70
CERTIFICATION	ETL, cETL (TO UL 48 STANDARDS)



US PATENT US9,709,227 B2



## SIMPLE GRAPHIC INSTALLATION (BY OTHERS)



## DIMENSIONS



## PERFORMANCE SUMMARY

11 W/FT	UNIFORMITY
48.0"	1.6:1
11 W/FT	LUMINANCE
48.0"	500 cd/m <sup>2</sup>

## ACCESSORIES / OPTIONS



PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ CATALOG #: PRS - 11 - 50K - - - - -

## ORDERING INFORMATION

PRS	11	50K							separate options with dashes
1	2	3	4	5	6	7	8	9	

**1** **FIXTURE**  
PARASIGN WAYFINDING PRS

**2** **WATTAGE**  
11 WATTS/FT 11

**3** **CCT**  
5000K 50K

**4** **MOUNTING**  
SURFACE/CEILING SMS  
PENDANT PNS

**5** **PANEL SIZE**  
48" X 12" 4812  
48" X 24" 4824  
96" X 12" 9612  
96" X 24" 9624  
For custom sizes and mounting, please contact factory.

**6** **VOLTAGE**  
120V INT1  
277V INT2

**7** **CONTROL**  
NON-DIMMING NO  
0-10V DIMMING DIM  
Dimming control system to be supplied by others.

**8** **FINISH**  
SEMI-GLOSS WHITE W  
SEMI-GLOSS BLACK BL  
SEMI-GLOSS NATURAL N  
SEMI-GLOSS BRONZE BR  
SEMI-GLOSS SATIN S  
CUSTOM COLOR CC  
Contact factory for custom color.  
Additional charges will apply.

**9** **OPTIONS**  
EDGE DIFFUSER ED  
Edge diffuser reduces 80% of the brightness on the panel edge only.  
Does not reduce the brightness on the panel face. best for direct view applications.

## FIXTURES PER CIRCUIT


	11 WATTS/FT	
LENGTH	120V	277V
48"	35	81
96"	17	40

PROJECT:	TYPE:	CATALOG #:	PRS - 11 - 50K - - - - -
----------	-------	------------	--------------------------

**DIMENSIONS**

	DIM A	DIM B	DIM C	DIM D
48"	48.31"	32"	48.00"	12.00", 24.00"
96"	96.31"	64"	96.00"	12.00", 24.00"

**SURFACE/CEILING (SMS)**

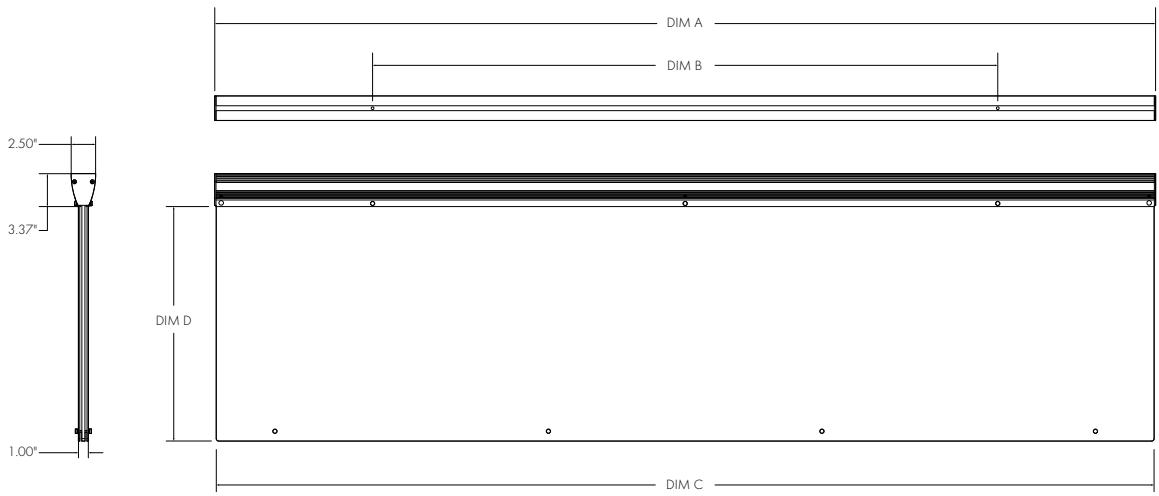

**PENDANT (PNS)**

