

PROJECT:	TYPE:	CATALOG #:	SCL - MO -	-	-	SMD - UNV -	-	-
----------	-------	------------	------------	---	---	-------------	---	---


**PROFILE**

WATTAGE	MO (40.0W)
OPTICS	15°, 30°, 55°
CCT	2700K, 3000K, 3500K, 4000K (82 CRI)
CRI	82+ CRI
PERFORMANCE	UP TO 21342 PEAK CANDELA
VOLTAGE	UNIVERSAL 120-277 V
POWER	INTEGRATED POWER SUPPLY
DIMMING	0-10V
DIMENSIONS	12.00" X 5.10"
HOUSING	EXTRUDED ALUMINUM HOUSING
LENS	TEMPERED GLASS
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-30° C TO 45° C
LUMEN MAINTENANCE	84,000 HOURS
CERTIFICATION	ETL AND cETL FOR WET LOCATION




FIXTURES SHOWN:  
SCL-MO-40K-55-SMD-UNV-DIM-TBL


**STANDARD FINISHES**

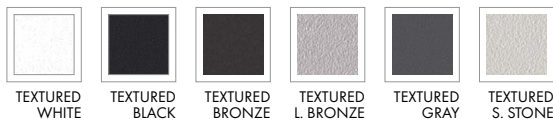

**OPTICS** Not all available options shown

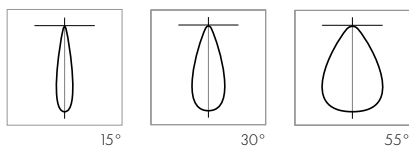

**PROFILE**

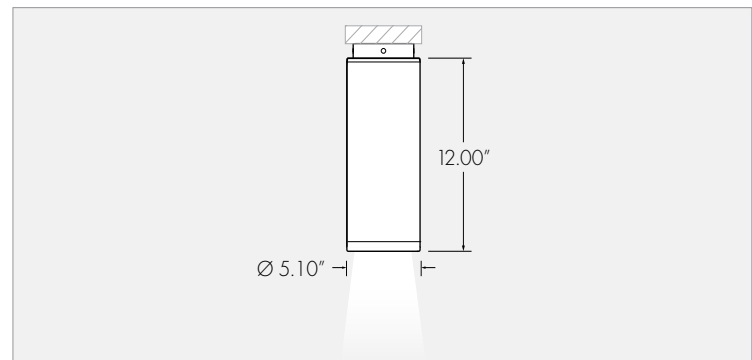

**PERFORMANCE SUMMARY** [Go To Performance Data >](#)

	15°	30°	55°
40K, MO			
LUMENS	3797	3850	3712
CANDELA	21342	12551	4944
EFFICACY	104.23 LM/W	105.57 LM/W	101.78 LM/W

PROJECT: \_\_\_\_\_ TYPE: \_\_\_\_\_ CATALOG #: SCL - MO - - - SMD - UNV - - -

**SPECIFICATION**

SCL	MO			SMD	UNV			seperate options with dashes
-----	----	--	--	-----	-----	--	--	------------------------------

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---

**1 FIXTURE**

SCOPE LARGE PENDANT	SCL
---------------------	-----

**2 WATTAGE**

MEDIUM OUTPUT 40 W	MO
-----------------------	----

**3 CCT**

2700K	27K
3000K	30K
3500K	35K
4000K	40K

**4 CATEGORY**

15°	15
30°	30
55°	55

**5 MOUNTING**

SURFACE, DOWNLIGHT	SMD
--------------------	-----

**6 VOLTAGE**

UNIVERSAL 120 - 277V	UNV
-------------------------	-----

**7 CONTROLS**

NON-DIMMING	NO
0-10V DIMMING	DIM
DMX DIMMING	DMX

Requires DMX Distribution and Programming Kit see below  
Dimming controls to be provided by others

**8 FINISH**

TEXTURED WHITE	TW
TEXTURED BLACK	TBL
TEXTURED BRONZE	TBR
TEXTURED LIGHT BRONZE	TLB
TEXTURED GRAY	TG
TEXTURED SANDSTONE	TS
CUSTOM COLOR	CC

Contact factory for custom color - additional charges will apply

**9 OPTIONS**

HIGH CRI, 90+	HCRI
CORROSION RESISTANT FINISH	CRF

Corrosion resistance finish complies with ASTM B117 standard  
CRF is recommended for coastal or extreme exterior environments

**CONTROL & WIRING OPTIONS** [go to DMX Guide >](#)

**DMX DISTRIBUTION/PROGRAMMING KIT - REQUIRED FOR DMX DIMMING**

DMX/RDM DISTRIBUTION KIT (4 OUTPUTS) - IP67	CDS-RDM
---	---------

DMX/RDM Distribution Kit consists of four outputs  
Each output is limited to one run per output - up to 32 fixtures max  
Four terminators are included for end of line termination

**RDM TOOL - OPTIONAL**

DMX/RDM PROGRAMMING TOOL	RDM
--------------------------	-----

DMX/RDM measurement and testing tool  
Allows for RDM addressing and monitoring of products that have RDM capability while also being able to test all elements of DMX data signals to ensure proper system operations  
Contact factory to order

PROJECT:	TYPE:	CATALOG #:	SCL - MO - - - - SMD - UNV - - - -
----------	-------	------------	------------------------------------

**PERFORMANCE**

**PERFORMANCE DATA**

MEDIUM OUTPUT (40.0 W)				
	OPTIC	DELIVERED LUMENS	LUMINARE EFFICACY	PEAK CANDELA
UP OR DOWN	15°	3797 LM	104.23 LM/W	21342
	30°	3850 LM	105.57 LM/W	12551
	55°	3712 LM	101.78 LM/W	4944

**MAXIMUM FIXTURES PER RUN**

MEDIUM OUTPUT (40.0 W)		
FIXTURE	120V	277V
12.00"	32	75

PROJECT:	TYPE:	CATALOG #:	SCL - MO - - - - SMD - UNV - - - -
----------	-------	------------	------------------------------------

**FIXTURE DIMENSIONS**

**SMD - SURFACE MOUNTING**

