

PROJECT:	TYPE:	CATALOG #:	PRS - 11 - 50K -	-	-	-	-	-
----------	-------	------------	------------------	---	---	---	---	---

SPECIFICATION


LIGHT SOURCE	11 W/FT
CCT	5000K
CRI	80 (± 200)
VOLTAGE	UNIVERSAL 120-277 V
POWER	INTEGRATED POWER SUPPLY
CONTROL	DIMMING
DIMENSIONS	6" - 24" HEIGHT X 12" - 96" LENGTH
WEIGHT	4.375 LBS/FT ²
HOUSING	UPPER ALUMINUM EXTRUSION
OPTICAL SYSTEMS	TRANSPARENT CAST ACRYLIC MM THICKNESS, LASER ETCHED
FINISH	HIGH DURABILITY POWDER COATING
WARRANTY	5-YEAR LIMITED
OPERATING TEMP	-25° C TO 40° C
LUMEN MAINTENANCE	75,000 HOURS L70
CERTIFICATION	ETL, cETL (TO UL 48 STANDARDS)



US PATENT US9,709,227 B2



SIMPLE GRAPHIC INSTALLATION (BY OTHERS)

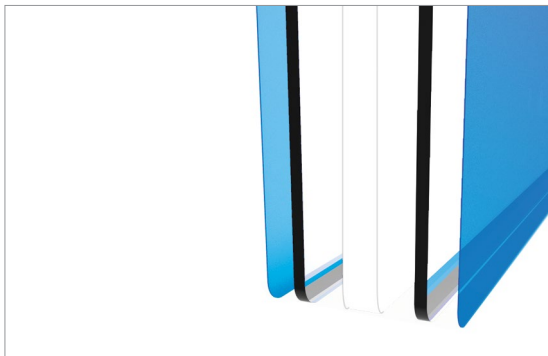

DIMENSIONS



PERFORMANCE SUMMARY

11 W/FT	UNIFORMITY
48.0"	1.6:1
11 W/FT	LUMINANCE
48.0"	500 cd/m ²

ACCESSORIES / OPTIONS



PROJECT: _____ TYPE: _____ CATALOG #: PRS - 11 - 50K - - - - -

ORDERING INFORMATION

separate options with dashes

PRS	11	50K						
1	2	3	4	5	6	7	8	9

1 **FIXTURE**
 SMART SIGN _____ PRS

4 **MOUNTING**
 SURFACE/CEILING _____ SMS
 PENDANT _____ PNS

6 **VOLTAGE**
 120V _____ INT1
 277V _____ INT2

8 **FINISH**
 SEMI-GLOSS WHITE _____ W
 SEMI-GLOSS BLACK _____ BL
 SEMI-GLOSS NATURAL _____ N
 SEMI-GLOSS BRONZE _____ BR
 SEMI-GLOSS SATIN _____ S
 CUSTOM COLOR _____ CC
Contact factory for custom color.
 Additional charges will apply.

2 **WATTAGE**
 11 WATTS/FT _____ 11

5 **PANEL SIZE**
 48" X 12" _____ 4812
 48" X 24" _____ 4824
 96" X 12" _____ 9612
 96" X 24" _____ 9624
For custom sizes and mounting, please contact
 factory.

7 **CONTROL**
 NON-DIMMING _____ NO
 0-10V DIMMING _____ DIM
Dimming control system to be supplied by others.

3 **CCT**
 5000K _____ 50K

9 **OPTIONS**
 EDGE DIFFUSER _____ ED
Edge diffuser reduces 80% of the brightness
 on the panel edge only.
 Does not reduce the brightness on the panel face.
 best for direct view applications.

FIXTURES PER CIRCUIT


	11 WATTS/FT	
LENGTH	120V	277V
48"	35	81
96"	17	40

PROJECT:	TYPE:	CATALOG #:	PRS - 11 - 50K -	-	-	-	-	-
----------	-------	------------	------------------	---	---	---	---	---

DIMENSIONS

	DIM A	DIM B	DIM C	DIM D
48"	48.31"	32"	48.00"	12.00", 24.00"
96"	96.31"	64"	96.00"	12.00", 24.00"

SURFACE/CEILING (SMS)

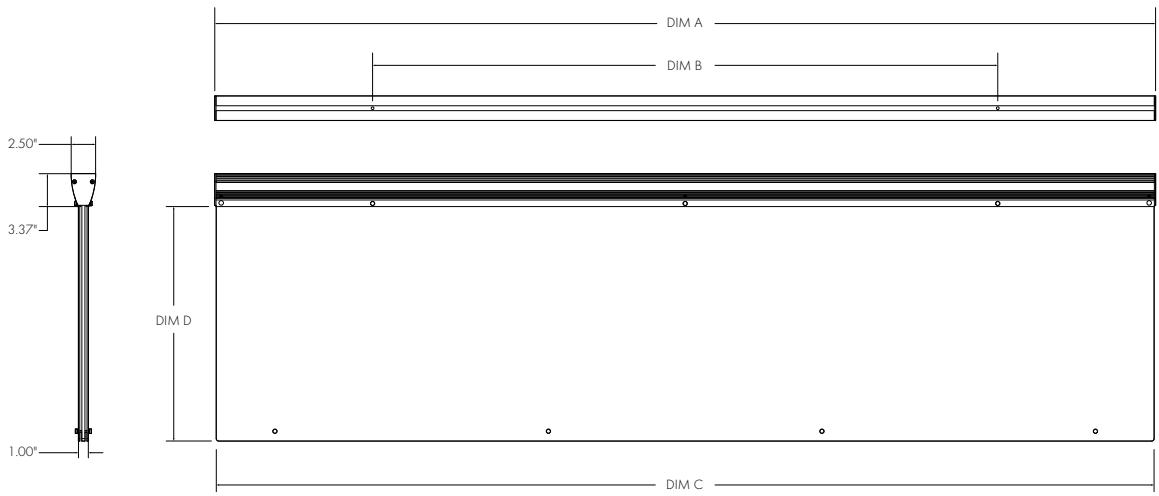

PENDANT (PNS)

